Precision Nitrogen Headspace

Nitrogen Generator

Part Number : 65-3000 Service Kit : See rever



Your local **gas generation** partner

Description

The Precision Nitrogen Standard Headspace 250 further compliments our Precision range of products for GC. Specially designed based on pressure swing technology, the Precision Nitrogen Headspace offers 250cc/min of UHP Nitrogen at a pressure of up to 100psi to supply the purest gas to your Headspace Autosampler.


The ground- breaking stackable design as part of the Precision Series also means that this generator is a true space saver.

As with all Precision Series generators, Nitrogen models benefit from a compact and modular, stackable design, minimizing the total footprint required for GC gas supply, and providing flexibility to add or remove modules as your laboratory requirements evolve over time.



Applications

- Headspace Autosamplers
- Ultra High Purity nitrogen make up gas

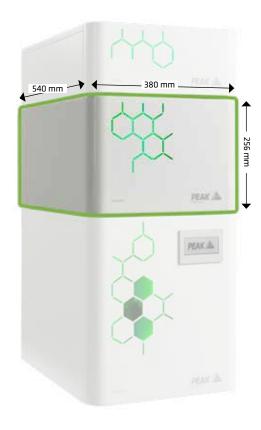

Key Features

- Suitable as make up gas for any GC as well as Headspace Autosamplers
- Nitrogen generated on demand
- Constant and consistent supply, avoid running out of gas during analysis
- Increased output pressure to meet the requirements of Headspace Autosamplers
- Avoid contaminants entering system as result of changing over empty cylinders
- Dedicated Precision compressor module optional where house supply not suitable or not available
- Integrates seamlessly with other Precision units
- Minimum maintenance with an annual filter change
- Compact, space-saving modular design



Precision Nitrogen Headspace in a typical Precision stack.

| Technical Specifications | Precision Headspace | |
|------------------------------|---|--|
| Max Flow Rate | 250cc/min | |
| Max Pressure | 100 psi / 6.9 bar | |
| Purity | > 99.9995% | |
| Gas Outlets | 1x1/4 " BSPP | |
| Min/Max Air Inlet Pressure | 120 psi / 8.3 bar | |
| Min Air Inlet Flow | 25 lpm | |
| Min Inlet Air Quality | ISO8573 - 1:2010 Class 1.4.1 | |
| Phthalates | None | |
| Suspended Liquids | None | |
| Operating Temperature | 5°C - 30°C / 41°F - 86 °F | |
| Electrical Requirements | 110-230 VAC / 50/60 Hz / 0.03A | |
| Power Consumption | 6.9 Watts | |
| Heat Output | 25 BTU/Hr | |
| Generator Dimensions (WxDxH) | 38.0 x 54 x 25.6 cm / 14.9 x 21.2 x 10" | |
| Generator Weight | 22.5 kg / 49.6 lbs | |

| Ordering Information | | | |
|--------------------------------------|---------|--|--|
| Part Number | 65-3000 | | |
| Annual Service | , | | |
| Fixed Price Preventative Maintenance | | | |
| Complete/Premium Maintenance Plan | | | |

| Precision Air Compressor | 110v | 230v |
|--------------------------|---------|---------|
| Part Number | 65-1555 | 65-0555 |

Peak Scientific gas generators define the benchmark in reliability, convenience and performance in laboratories around the world, and come backed by a 12 month warranty. Beyond this period however you can ensure that you're investment continues to be [Protected] by our comprehensive generator care cover.

Our world-class aftercare support packages deliver a program of scheduled preventative maintenance whilst giving you the reassurance of instant access to worldwide technical support and priority on-site response in the untimely event of a breakdown.

Peak Scientific UK Tel: +44 (0)141 812 8100 Fax: +44 (0)141 812 8200

Peak Scientific North America

Tel: +1 866 647 1649 Fax: +1 978 608 9503

For a full list of our worldwide office locations, please visit:

Web: www.peakscientific.com Email: marketing@peakscientific.com





