


FAMES
Commercial Margarine
Stabilwax®
(split injection)

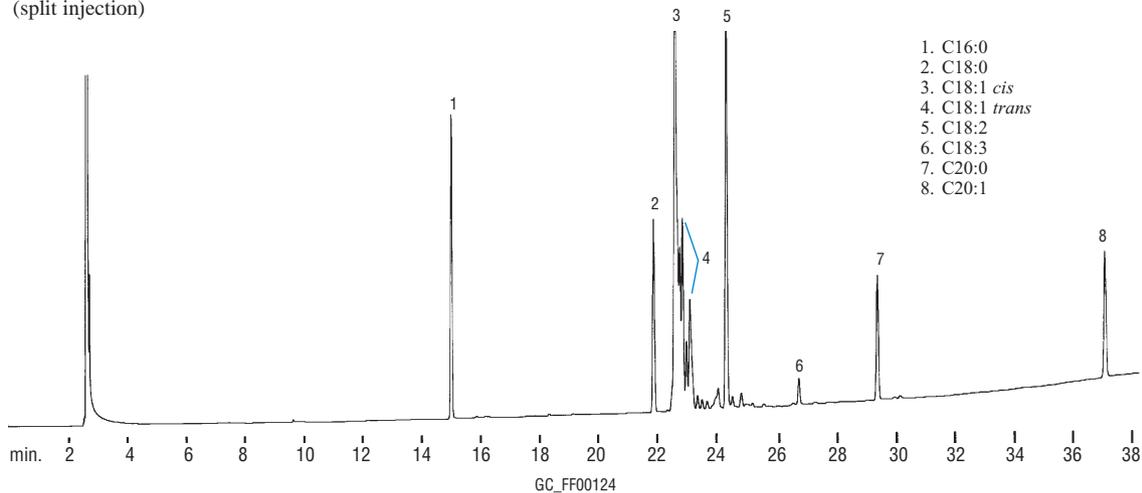

60m, 0.32mm ID, 0.25µm Stabilwax (cat.# 10627)
1.0µL split injection of a commercial margarine mixture.

Oven temp.: 160°C to 250°C @ 2°C/min. (hold 1 min.)
Inj. & det. temp.: 260°C
Carrier gas: hydrogen
Linear velocity: 40cm/sec. (flow rate: 3.2cc/min.)
FID sensitivity: 1 x 10¹¹ AFS
Split ratio: 100:1